




AIR APPLIED/SPRING RELEASED BRAKE

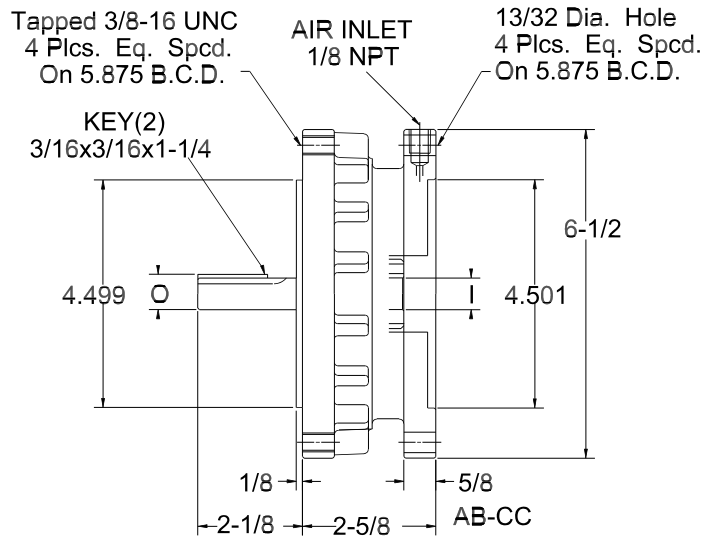

Dimensions shown are for general purposes only.
 Certified prints will be furnished upon request for design and installation purposes.

AB BRAKE

MODEL	WK ² OF ROTATING PARTS	TORQUE** (IN-LBF)	STATIC	DYNAMIC	MAXIMUM RPM
625	.44 IN ² -LBF	BRAKE @ 80 psi FULL LINING	500	425	1800

STANDARD ASSEMBLIES	I (INCHES)	O (INCHES)	SHAFT	OUTPUT SHAFT OHL*	NEMA FRAMES	HEAT DISSIPATION	HEAT CAPACITY	WEIGHT
625AB-CC	.626	.625	2.125	0	48Y/56C	.12 HP	20,000 FT-LBF	14 LBS.

*Based on 10,000 hours bearing life with load 1 inch from bearing face.

**The initial torque on new units may be up to 40% less than torque values shown until the friction lining is worn in.

AB REPAIR KIT	
MODEL	PART NUMBER
625 AB-CC	4301K