





CB CALIPER BRAKE PNEUMATIC CALIPER BRAKE

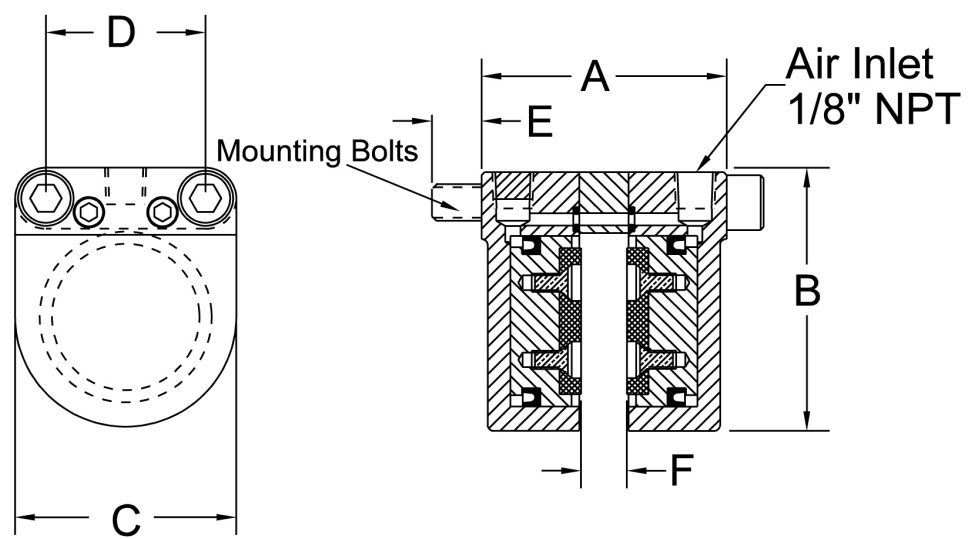

MODEL	A	B	C	D	E	F	MOUNTING BOLTS	STATIC TANGENTIAL FORCE @ 80 PSI	LINING AREA	WEARABLE LINING VOLUME
CB100	2.5 (63.5)	2.625 (66.7)	2.25 (57.1)	1.625 (41.3)	.5 (12.7)	.375 (9.5)	.375-16, NC	125 Lbs (556 N)	3.3 sq in (21.3 cm ²)	.33 cu in (5.4 cm ³)
CB200	2.875 (73)	3.750 (95)	3.125 (79)	2.250 (57)	.625 (16)	.406 (10)	.5-13, NC	250 (1100 N)	8 sq in (52 cm ²)	1.0 cu in (16 cm ³)

ROTOR SPECIFICATIONS STATIC TORQUE RATINGS @ 80 PSI

PART NUMBER	DIA.	A	B	C	D	B.C.D.	QD BUSHING BORE	CB100	CB200	CB100	CB200
								Static Torque Ratings @80PSI Air Pressure		Static Torque Ratings @160PSI Hydraulic Pressure	
6161	6" (152mm)	2.000	1.375	.625	.375	1.656	"JA" 1 1/4" MAX.	270 IN-LB (31 NM)	440 IN-LB (50 NM)	540 IN-LB (61 NM)	880 IN-LB (99 NM)
6162	9" (229mm)	2.688	1.871	.875	.375	2.250	"SH" 1 11/16" MAX.	460 IN-LB (52 NM)	810 IN-LB (92 NM)	920 IN-LB (104 NM)	1620 IN-LB (183 NM)
6163	12" (305mm)	3.875	2.813	1.250	.375	3.313	"SK" 2 3/8" MAX.	650 IN-LB (73 NM)	1190 IN-LB (134 NM)	1300 IN-LB (147 NM)	2380 IN-LB (269 NM)

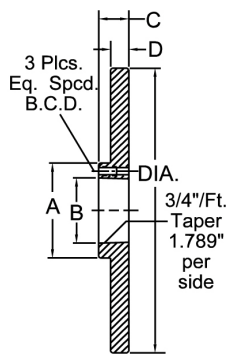

* Supplied By Customer

THE CARLSON CO. INC. USA
 Fax: (316) 744-2144 • Phone: (316) 744-0481
 www.carlsoncompany.com

2008

E-2

() - contains metric dimensions
 Dimensions shown are for general information only.
 Certified prints will be furnished upon request for
 design and installation purposes.