


HYDRAULIC CALIPER BRAKE

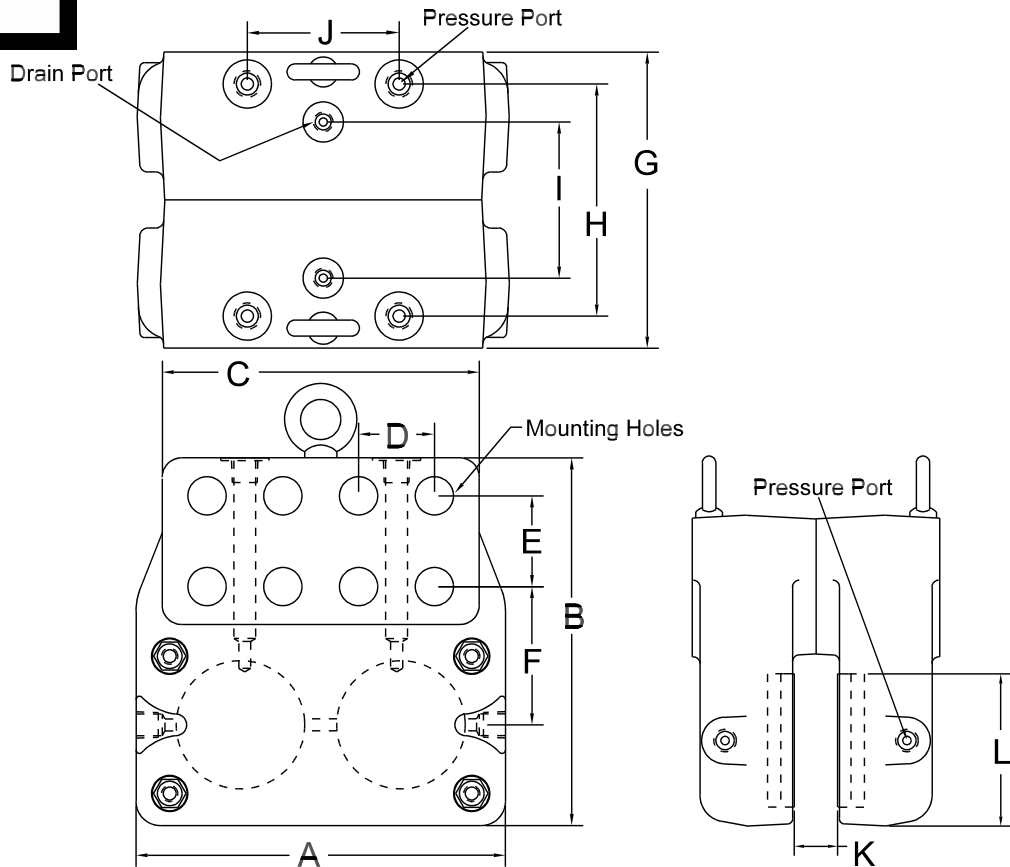

MODEL	MAXIMUM HYDRAULIC PRESSURE	TANGENTIAL FORCE @ 2000psi	WEARABLE LINING VOLUME	LINING AREA	WEIGHT
CBHD10	2,200	10,000 Lb.	4.5in ³	24 Sq. in.	52 lb
CBHD30	2,200	30,000 Lb.	17.5in ³	70 Sq. in.	150 lb
CBHD90	2,200	90,000 Lb.	46 in ³	185 Sq. in.	470 lb

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	MOUNTING HOLES	PRESSURE PORT
CBHD10	5.75	5.75	4.94	1.181	1.417	2.16	4.625	3.63	2.44	2.38	.810	2.85	19/32" Dia. 8plcs.	1/4 - 18, NPT 8 plcs.
CBHD30	10.2	9.21	9	2.284	2.559	3.219	8.11	5.88	3.84	4.56	1.250	4.44	1 1/8" Dia. 8plcs.	1/4 - 18, NPT 8 plcs.
CBHD90	19.7	11.8	17.25	2.953	3.543	3.94	10.78	8.56	4.5	11.8	1.687	5.8	1.47" Dia. 12plcs.	1/4 - 18, NPT 8 plcs.